




SOLENOID VALVES

pilot operated, spool type
single/dual solenoid (mono/bistable function)
brass body, 1/4



3/2
Series
551

FEATURES

- The monostable spool valves, series 551, have TÜV certified IEC 61508 Functional Safety data and can be used up to SIL 4/AK 7
- All the exhaust ports of this spool valve are connectable, providing better environmental protection, particularly recommended for sensitive areas such as clean rooms, and applications in the pharmaceutical and food processing sectors
- The valve offers environmental protection against the ingress of liquids, dusts or any other foreign matter (environmentally-protected construction)
- Can be externally piloted (external air pilot supply) to convert valve to zero minimum operation by flipping a gasket
- The solenoid valves satisfy all relevant EC Directives

GENERAL




Differential pressure 2 - 10 bar [1 bar =100 kPa]
Flow (Qv at 6 bar) 860 l/min (ANR)

fluids (*)	temperature range (TS)	seal materials (*)
air, inert gas, filtered	- 40°C to + 60°C	VMQ (silicone) + PUR (polyurethane)

MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified

Body, end covers	Brass
Spool valve internal parts	Brass, stainless steel, POM
Core tube	Stainless steel
Core and plugnut	Stainless steel
Core spring	Stainless steel
Seals & discs	NBR
Top disc	PA
Disc holder	POM
Cartridge (low power)	Welded, packless AISI 430
Seat	Brass
Seat insert	POM
Shading coil	Copper
Rider rings (low power)	PTFE

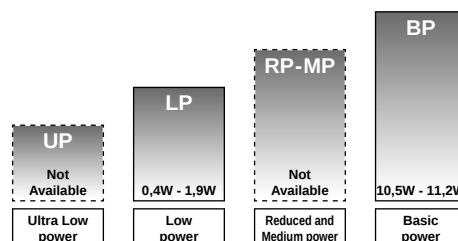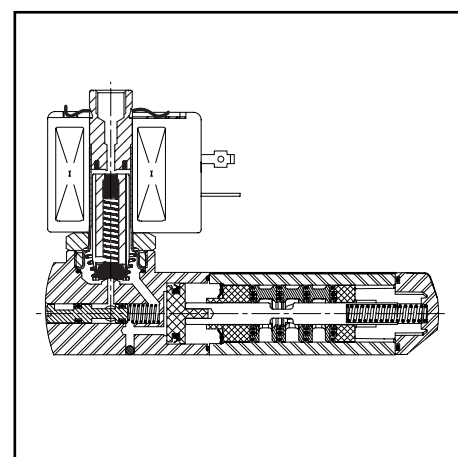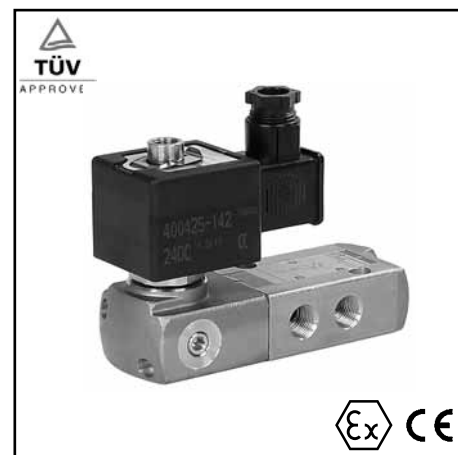

POWER LEVELS - cold electrical holding values (watt)

SPECIFICATIONS

pipe size	orifice size	flow coefficient kv		operating pressure differential (bar)			power level	prefix optional solenoids								basic catalogue number
				min. ⁽²⁾	max. (PS)			NEMA 7 & 9	ATEX/CENELEC (gas/dust)					IP65		
					air (★)				EEEx d	EEEx em	EEEx m	EEEx i	EEEx n			
(✧)	(mm)	(m³/h)	(l/min)		~	=	~/=	EF	NF	NK	EM	PV	IS	ZN	SC	
Solenoid air pilot operated - spring return (monostable)																
1/4	6	0,75	12,5	0 / 2	10	10	BP	-	●	●	●	●	-	●	●	❖551A407 ⁽¹⁾
1/4	6	0,75	12,5	0 / 2	10	10	BP	●	-	-	-	-	-	-	-	❖551G407 ⁽¹⁾
1/4	6	0,75	12,5	0 / 2	10	10	LP	-	●	-	●	○	○	○	●	❖551A307 ⁽¹⁾
1/4	6	0,75	12,5	0 / 2	10	10	LP	○	-	-	-	-	-	-	-	❖551G307 ⁽¹⁾
Solenoid air pilot operated and return (bistable)																
1/4	6	0,75	12,5	0 / 2	10	10	BP	-	●	●	●	●	-	●	●	❖551A408
1/4	6	0,75	12,5	0 / 2	10	10	BP	●	-	-	-	-	-	-	-	❖551G408
1/4	6	0,75	12,5	0 / 2	10	10	LP	-	●	-	●	○	○	○	●	❖551A308
1/4	6	0,75	12,5	0 / 2	10	10	LP	○	-	-	-	-	-	-	-	❖551G308

❖ Select **8** for NPT ANSI 1.20.3 or select **G** for ISO G (228/1) ● Available feature ○ Available feature in DC only.

⁽¹⁾ Certified IEC 61508 Functional Safety data, use suffix "SL".

⁽²⁾ Zero minimum is only achieved if external pressure is applied.

PREFIX TABLE

prefix							description	power level			
1	2	3	4	5	6	7		LP	RP	MP	BP
S	C			D	U		Dustproof ATEX (EN 50281-1-1) *	-	-	-	●
E	F						Explosionproof - NEMA 3, 4, 6, 7, 9	○	-	-	●
E	V						Explosionproof - NEMA 3, 4, 6, 7, 9 - 316 SS	○	-	-	●
E	M						Encapsulated ATEX (EN 50019 & EN 50028) *	●	-	-	●
		E	T				Threaded conduit/hole (M20 x 1.5)	●	-	-	●
I	S				S	C	Intrinsically safe with SC coil ATEX (EN 50020) *	○	-	-	-
N	F						Flameproof - Alum. ATEX (EN 50018) *	●	-	-	●
N	L						Flameproof - Cast iron ATEX (EN 50018) *	●	-	-	●
N	K						Flameproof - Alum. ATEX (EN 50018) *	-	-	-	●
P	V						Encapsulated ATEX (EN 50028) *	○	-	-	●
S	C						Solenoid with spade plug connector (EN 60730)	●	-	-	●
W	P						Waterproof IP67 - Metal enclosure (EN 60730)	●	-	-	●
W	S						Waterproof IP67 - 316 SS enclosure (EN 60730)	●	-	-	●
W	S	E	M				316 SS "EM" enclosure ATEX (EN 50019 & EN 50020) *	●	-	-	●
W	P			D	U		Dustproof ATEX (EN 50281-1-1) - Metal enclosure *	-	-	-	●
W	S			D	U		Dustproof ATEX (EN 50281-1-1) - 316 SS enclosure *	-	-	-	●
W	P			I	S		I.S. with Metal IP67 enclosure ATEX (EN 50020) *	○	-	-	-
W	S			I	S		I.S. with Metal IP67- 316 SS enclosure ATEX (EN 50020) *	○	-	-	-
W	S	N	F				Flameproof - 316 SS ATEX (EN 50018) *	●	-	-	●
Z	N						Encapsulated Non Sparking ATEX (EN 50021) *	○	-	-	●
			T				Threaded conduit (1/2" NPT)	●	-	-	●
				H	T		Class H - High temperature, +80°C ambient temp.	-	-	-	●
						X	Other special constructions	●	-	-	●

PRODUCT SELECTION GUIDE

STEP 1

Select basic catalogue number, including pipe thread identification letter. Refer to the specifications table on page 1.

Example: G551A407

STEP 2

Select prefix (combination). Refer to the specifications table on page 1 and the prefix table on page 2, respect the indicated power level.

Example: EM

STEP 3

Select suffix (combination) if required. Refer to the suffix table on page 2, respect the indicated power level.

Example: MO

STEP 4

Select voltage. Refer to standard voltages on page 3.

Example: 230V / 50Hz

STEP 5

Final catalogue / ordering number.

Example:

EM G551A407MO 230 V / 50 Hz

SUFFIX TABLE

suffix							description	power level			
1	2	3	4	5	6	7		LP	RP	MP	BP
			M	O			Push type or screw type manual operator	○/●	-	-	●
	S	L					Certified IEC 61508 Functional Safety data ⁽²⁾	○/●	-	-	●

OPTIONS & ACCESSORIES

series	pipe size	exhaust protector (stainless steel)
551	G 1/8	34600418 ⁽¹⁾
	NPT 1/8	34600482 ⁽¹⁾
	G 1/4	34600419 ⁽¹⁾
	NPT 1/4	34600483 ⁽¹⁾

● Available feature

○ Available feature in DC only

- Not available

* ATEX solenoids are also approved to EN 50281-1-1 (dust) and EN 13463-1 (non electrical valves)

⁽¹⁾ Provided with "SL" suffix

⁽²⁾ Not to use with MO suffix

ORDERING EXAMPLES:

SC	G	551	A	407		230V / 50 Hz
SC	G	551	A	407	SL	230V / 50 Hz
SC	G	551	A	408	MO	230V / 50 Hz
SCHT	8	551	A	408	MO	230V / 50 Hz
ISSC	G	551	A	408	MO	24V / DC
WPIS	G	551	A	307		24V / DC
EM	8	551	A	407	MO	230V / 50 Hz
EF	G	551	G	407	MS	240V / 60 Hz

⁽³⁾ Prefix EF should always be used with the letter G in the basic number.

ELECTRICAL CHARACTERISTICS

Coil insulation class

F

Connector

Spade plug (cable Ø 6 - 10 mm)

Connector specification

ISO 4400 / EN 175301-803, form A

Electrical safety

IEC 335

Standard voltages

DC (=) 24V - 48V

AC (-) 24V - 48V - 115V - 230V/50Hz; other voltages and 60Hz are available on request

prefix option	power ratings				operator ambient temperature range (TS)	safety code	electrical enclosure protection (EN 60529)	replacement coil		type ⁽¹⁾
	inrush ~	holding ~		hot/cold =				~	=	
	(VA)	(VA)	(W)	(W)				(C°)	230 V/50 Hz	
Basic power (BP)										
SC	55	23	10,5	9/11,2	-40 to +75	EN 60730	moulded IP65	400425-117	400425-142	01
SCDU	55	23	10,5	9/11,2	-40 to +75	II 3D IP65 T 200°C(-)/135°C(=)	moulded IP65	- ⁽³⁾	- ⁽³⁾	01
WP	55	23	10,5	9/11,2	-40 to +75	EN 60730	steel IP67	400405-117	400405-142	04
WPDU	55	23	10,5	9/11,2	-40 to +75	II 3D IP67 T 200°C	steel IP67	- ⁽³⁾	- ⁽³⁾	04
WS	55	23	10,5	9/11,2	-40 to +75	EN 60730	st. steel IP67	400405-117	400405-142	04
WSDU	55	23	10,5	9/11,2	-40 to +75	II 3D IP67 T 200°C	st. steel IP67	- ⁽³⁾	- ⁽³⁾	04
(WS)NF/NL	55	23	10,5	-	-60 to +25/40/60	II 2G/D EEx d IIC T6/T5/T4	alu/steel IP67	400405-117	-	02
(WS)NF/NL	-	-	-	9/11,2	-60 to +40/60/75	II 2G/D EEx d IIC T6/T5/T4	alu/steel IP67	-	400405-142	02
NK	55	23	10,5	9/11,2	-40 to +50/60	II 2G/D EEx d IIB+H ₂ T4(-/=)	aluminium IP65	400405-117	400405-142	03
EM	55	23	10,5	9/11,2	-40 to +40	II 2G/D EEx em II T3	steel IP67	400909-117	400913-142	04
WSEM	55	23	10,5	9/11,2	-40 to +40	II 2G/D EEx em II T3	st. steel IP67	400909-117	400913-142	04
PV	55	23	10,5	9/11,2	-40 to +65	II 2G/D EEx m II T3(~)T4(=)	moulded IP65	- ⁽³⁾	- ⁽³⁾	05
EF	55	23	10,5	9/11,2	-40 to +54/40	NEMA type 7 and 9	NEMA 4X	238610-058	238710-006	06
EV	55	23	10,5	9/11,2	-40 to +54/40	NEMA type 7 and 9-316 SS	NEMA 4X	238610-058	238710-006	06
ZN	55	23	10,5	9/11,2	-20 to +50	II 3G/D EEx nA II T3	moulded IP65	- ⁽³⁾	- ⁽³⁾	01
Low power (LP)										
SC	1,5	1,5	1,5	1,7/1,7	-40 to +60	EN 60730	moulded IP65	- ⁽³⁾	- ⁽³⁾	07
WP	1,5	1,5	1,5	1,7/1,7	-40 to +60	EN 60730	steel IP67	- ⁽³⁾	- ⁽³⁾	09
WS	1,5	1,5	1,5	1,7/1,7	-40 to +60	EN 60730	st. steel IP67	- ⁽³⁾	- ⁽³⁾	09
NF	-	-	1,9	-1,9	-40 to +75	II 2G/D EEx d IIC T6	aluminium IP67	- ⁽³⁾	- ⁽³⁾	08
NL	-	-	1,9	-1,9	-40 to +75	II 2G/D EEx d IIC T6	cast iron IP67	- ⁽³⁾	- ⁽³⁾	08
WSNF	-	-	1,9	-1,9	-40 to +75	II 2G/D EEx d IIC T6	st. steel IP67	- ⁽³⁾	- ⁽³⁾	08
EM	1,5	1,5	1,5	1,7/1,7	-40 to +40/55	II 2G/D EEx em II T6/T5	steel IP67	- ⁽³⁾	- ⁽³⁾	09
WSEM	1,5	1,5	1,5	1,7/1,7	-40 to +40/55	II 2G/D EEx em II T6/T5	st. steel IP67	- ⁽³⁾	- ⁽³⁾	09
PV	-	-	-	1,7/1,7	-40 to +60	II 2G/D EEx m II T6	moulded IP65	-	- ⁽³⁾	10
EF	-	-	-	1,7/1,7	-40 to +40	NEMA type 7 and 9	NEMA 4X	-	- ⁽³⁾	11
EV	-	-	-	1,7/1,7	-40 to +40	NEMA type 7 and 9-316 SS	NEMA 4X	-	- ⁽³⁾	11
ISSC ⁽²⁾	-	-	-	0,4/0,4	-40 to +60	II 1G/2D EEx ia IIC T6	moulded IP65	-	268976-001	12
WPIS ⁽²⁾	-	-	-	0,4/0,4	-40 to +60	II 1G/2D EEx ia IIC T6	steel IP67	-	268900-001	09
WSIS ⁽²⁾	-	-	-	0,4/0,4	-40 to +60	II 1G/2D EEx ia IIC T6	st. steel IP67	-	268900-001	09
ZN	-	-	-	1,7/1,7	-20 to +50	II 3G/D EEx nA II T3	moulded IP65	-	- ⁽³⁾	07

- Not available

⁽¹⁾ Refer to the dimensional drawings on pages 4 to 6.⁽²⁾ Intrinsically safe pilots: Check the electrical characteristics in the corresponding catalogue pages (ISSC/WPIS/WSIS operators).⁽³⁾ Multiple coil kits available under ATEX, contact us

prefix option	safety parameters				
	U _i = (DC)	I _i	P _i	L _i	C _i
	(V)	(mA)	(W)	(μF)	(mF)
Low power (LP)					
ISSC	32	500	1,5	0	0
WPIS/WSIS	32	500	1,5	0	0

ADDITIONAL OPTIONS


- Valves configured for external pilot air supply, TPL 20547
- Other pipe threads are available on request
- EEx m (prefix "PV") execution can be supplied in various cable lengths
- Compliance with "UL", "CSA" and other local approvals available on request
- 1/2" NPT (prefix "T") and M20 x 1.5 (prefix "ET") conduits (aluminium or 316 SS) available for steel solenoid housing

INSTALLATION

- Installation/maintenance instructions are included with each valve
- The solenoid valves can be mounted in any position without affecting operation
- IEC 61508 Functional Safety (Suffix SL), allowable temperature range: -40°C to +60°C. Probability of failure on demand, contact us
- It is necessary to connect pipes or fittings to the exhaust ports to protect the internal parts of the spool valve and its pneumatic operator if used outside or in harsh environments (dusts, liquids etc.)
- Threaded pipe connection identifier is: 8 = NPT (ANSI 1.20.3); G = G (ISO 228/1)
- EEx d (prefix "NF") enclosure is provided with a 1/2" NPT threaded entry hole [optionally, M20 x 1,5 (prefix "ET")] and is supplied without cable gland
- EEx d (prefix "NK") enclosure is provided with a 3/4" NPT threaded entry hole [optionally, 1/2" NPT (prefix "T") or M20 x 1,5 (prefix "ET")] and is supplied without cable gland
- EEx em (prefix "EM") execution: solenoid enclosure has a cable gland with integral strain relief for cables with an o.d. from 7 to 12 mm and is provided with an internal and external connection facility for an earthing or bonding conductor
- Valves with suffix "SL" are provided with a specific exhaust protector

DIMENSIONS (mm), WEIGHT (kg)

All types

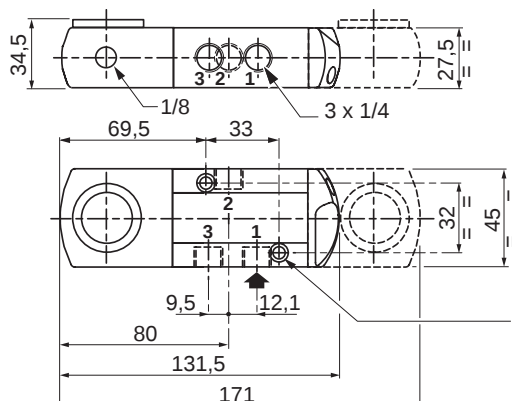


2 mounting holes 5.3 mm dia.;
Spotfacing: 9 mm dia., depth 5 mm



TYPE 01

Prefix "SC", "ZN" and "SCDU" Solenoid
Basic power
Epoxy moulded
IEC 335 / ISO 4400 (SC/SCDU)
EN 50021 (ZN)
IP65 / II 3 D IP65 T 100°C to 200°C / II 3 G/D EEx nA II


551A407 / 551A408

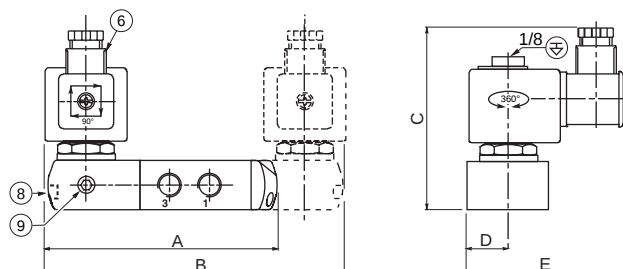

TYPE 02

Prefix "NF", "NL" and "WSNF" Solenoid
Basic power
Aluminium, steel; epoxy coated (NF and NL)
AISI 316 SS (WSNF)
EN 50018 and EN 50281-1-1
IP67 / II 2 G/D EEx d IIC


551A407 / 551A408

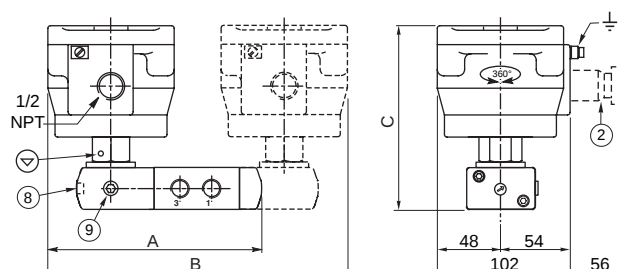

TYPE 03

Prefix "NK" Solenoid
Basic power
Aluminium; epoxy coated
EN 50018 and EN 50281-1-1
IP65 / II 2 G/D EEx d IIB + H2


551A407 / 551A408

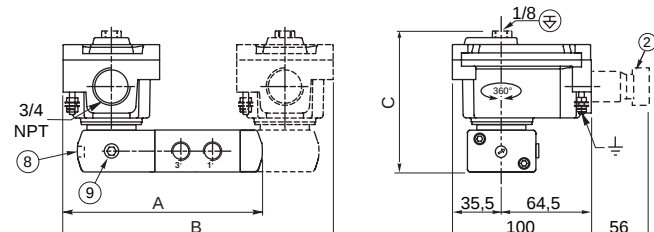

TYPE 04

Prefix "WP", "WS" / "WPDU", "WSDU" / "EM", "WSEM" Solenoid
Basic power
Steel; epoxy coated (WP, WPDU and EM)
AISI 316 SS (WS, WSDU and WSEM)
IEC 335 / EN 50019 & EN 50028 EN 50281-1-1
IP67 / II 3 D IP65 T 135°C to 200°C / II 2 G/D EEx em II

551A407 / 551A408

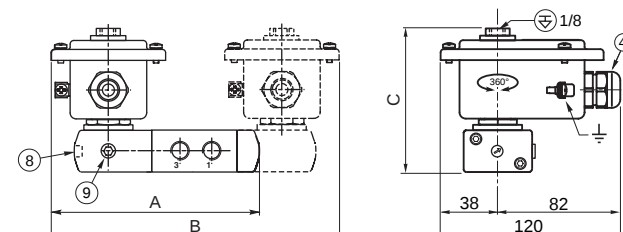




DIMENSIONS (mm), WEIGHT (kg)



TYPE 05

Prefix "PV" Solenoid
Basic power
Epoxy encapsulated
EN 50028 and EN 50281-1-1
II 2 G/D EEx m II
IP65



551A407 / 551A408



TYPE 06

Prefix "EF" and "EV" Solenoid
Basic power
Epoxy encapsulated
ICS-6 ANSI / NEMA
Type 7 and 9
Note: applicable to solenoid only



551G407 / 551G408



TYPE 07

Prefix "SC" / "ZN" Solenoid
Low power
Epoxy moulded
IEC 335 / ISO 4400 (SC)
EN 50021 (ZN)
IP65 / II 3 G/D EEx nA II



551A307 / 551A308



TYPE 08

Prefix "NF", "NL" and "WSNF" Solenoid
Low power
Aluminium, steel; epoxy coated (NF and NL)
AISI 316 SS (WSNF)
EN 50018 and EN 50281-1-1
IP67 / II 2 G/D EEx d IIC



551A307 / 551A308



TYPE 09

Prefix "WP", "WS" / "EM", "WSEM" Solenoid
Prefix "WPIS" / "WSIS" Solenoid
Low power
Metal; epoxy coated / AISI 316 SS
IEC 335 / EN 50019 & EN 50028 / EN 50020 EN 50281-1-1
IP67 / II 2 G/D EEx em II / II 1G/2D EEx ia IIC



551A307 / 551A308



TYPE 10

Prefix "PV" Solenoid
Low power
Epoxy encapsulated
EN 50028 and EN 50281-1-1
II 2 G/D EEx m II
IP65

551A307 / 551A308




DIMENSIONS (mm), WEIGHT (kg)



TYPE 11

Prefix "EF" Solenoid
Low power
Epoxy encapsulated
ICS-6 ANSI / NEMA
Type 7 and 9
Note: applicable to solenoid only


551G307 / 551G308

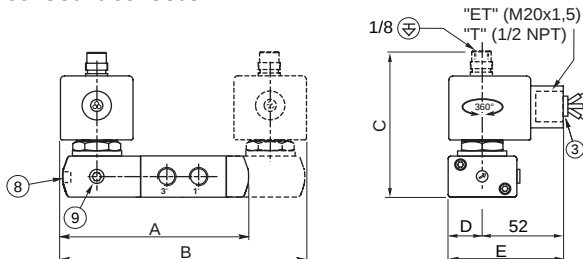

TYPE 12

Prefix "ISSC" Solenoid
Low power
Polypropylene moulded
EN 50020 and EN 50281-1-1
II 1G/2D EEx ia IIC

551A307 / 551A308



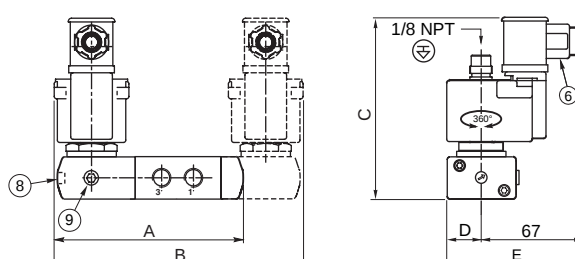


type	prefix option	power level	A	B	C	D	E	weight ⁽¹⁾	
								monostable	bistable
01	SC / SCDU / ZN	basic power	132	170	102,7	22,5	86,5	0,76	1,34
02	NF	basic power	158	224	141,8	-	-	1,85	3,51
02	WSNF	basic power	158	224	141,8	-	-	3,15	4,81
02	NL	basic power	158	224	141,8	-	-	2,95	4,61
03	NK	basic power	143	196	102	-	-	1,02	1,84
04	WP/WPDU/WS/WSDU/EM/WSEM	basic power	148	204	103	-	-	1,62	2,22
05	PV	basic power	132	172	88	22,5	67,5	0,82	1,45
06	EF / EV	basic power	132,5	173	85,5	22,5	74,5	0,64	1,29
07	SC / ZN	low power	132,5	173	101,5	22,5	87,5	0,97	1,55
08	NF	low power	158	224	141,8	-	-	1,85	3,51
08	WSNF	low power	158	224	141,8	-	-	3,15	4,81
08	NL	low power	158	224	141,8	-	-	2,95	4,61
09	WP / WS / EM / WSEM / WPIS / WSIS	low power	148	204	102,2	-	-	1,05	1,70
10	PV	low power	132	172	100,5	22,5	67,5	1,03	1,67
11	EF / EV	low power	132,5	173	100,5	22,5	74,5	0,85	1,50
12	ISSC	low power	122	175	124,5	22,5	89,5	0,80	1,41

⁽¹⁾ Incl. coil(s) and connector(s)

- ② EEx d certified cable gland (on request)
- ③ Three-core cable, length 2 m
- ④ Cable gland for unarmoured cable with 7 to 12 mm dia. sheath
- ⑥ Connector rotatable by 90° increments (Ø 6 - 10 mm)
- ⑧ Push type or screw type manual operator, suffix MO
- ⑨ External pilot air supply, 1/8 pipe size
- ⊕ Connectable pilot exhaust port
- ▽ Non-connectable pilot exhaust port


ACCESSORIES





SPOOL VALVES

pilot operated or air operated, spool type
single/dual solenoid (mono/bistable function)
brass body, 1/4



3/2
Series
551

FEATURES

- The monostable spool valves, series 551, have TÜV certified IEC 61508 Functional Safety data and can be used up to SIL 4/AK 7
- All the exhaust ports of this spool valve are connectable, providing better environmental protection, particularly recommended for sensitive areas such as clean rooms, and applications in the pharmaceutical and food processing sectors
- The valve offers environmental protection against the ingress of liquids, dusts or any other foreign matter (environmentally-protected construction)
- The solenoid valves satisfy all relevant EC Directives

GENERAL


Differential pressure 2 - 10 bar [1 bar =100 kPa]
Flow (Qv at 6 bar) 860 l/min (ANR)

fluids (*)	temperature range (TS)	seal materials (*)
air, inert gas, filtered	- 25°C to + 40°C	VMQ (silicone) + PUR (polyurethane)

MATERIALS IN CONTACT WITH FLUID


(*) Ensure that the compatibility of the fluids in contact with the materials is verified

	Air operated	CNOMO solenoid (pilot) interface
Body, end covers	Brass, AISI 316L	Brass, AISI 316L
Spool valve internal parts	Brass, stainless steel, POM	Brass, stainless steel, POM
Seals	NBR	NBR
Pilot internal parts	-	Size 15 (E06.36.120N), refer to catalogue pages: 302 pilot (CFSC/CFSD/CFVT/CFL/CFSCIS/CFSDIS/CFVTIS) and 630 piezotronic pilot (PISC/PISCIS)

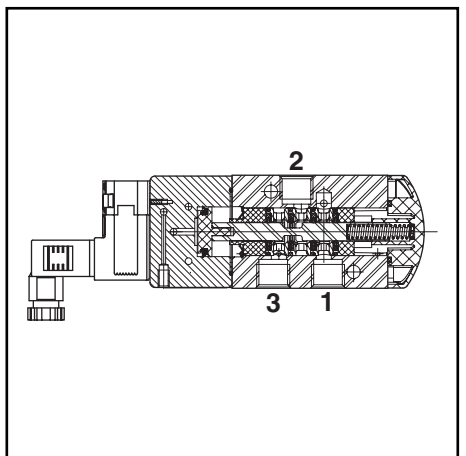

AIR OPERATED SPECIFICATIONS

pipe size	orifice size	flow coefficient kv		operating pressure differential (bar)			prefix optional	basic catalogue number
				min.	max. (PS)	air (*)		
(*)	(mm)	(m³/h)	(l/min)			~ =		
Pilot air operated - spring return (monostable)								
1/4	6	0,75	12,5	2	10	10	-	❖551A107 ⁽¹⁾
Pilot air operated and return (bistable)								
1/4	6	0,75	12,5	2	10	10	-	❖551A108

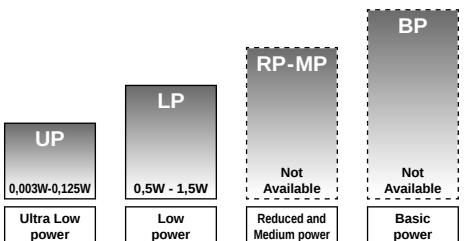

POWER LEVELS - cold electrical holding values (watt)

CNOMO SOLENOID (PILOT) INTERFACE SPECIFICATIONS

pipe size	orifice size	flow coefficient kv		operating pressure differential (bar)			power level	prefix optional solenoids								basic catalogue number	
				min.	max. (PS)			ATEX/CENELEC				IP65					
					air (*)			EEx i									
(*)	(mm)	(m³/h)	(l/min)		~	=	~/=	CFSCIS	CFSDIS	CFVTIS	PISCIS	CFSC	CFSD	CFVT	CFL	PISC	CNOMO size 15
Solenoid air pilot operated - spring return (monostable)																	
1/4	6	0,75	12,5	2	10	10	LP	-	-	-	-	●	●	●	●	-	❖551C507 ⁽¹⁾
1/4	6	0,75	12,5	2	-	8	LP	○	○	○	-	-	-	-	-	-	❖551C507 ⁽¹⁾
1/4	6	0,75	12,5	2	8	8	UP	-	-	-	○	-	-	-	-	●	❖551C507 ⁽¹⁾
Solenoid air pilot operated and return (bistable)																	
1/4	6	0,75	12,5	2	10	10	LP	-	-	-	-	●	●	●	●	-	❖551C508
1/4	6	0,75	12,5	2	-	8	LP	○	○	○	-	-	-	-	-	-	❖551C508
1/4	6	0,75	12,5	2	8	8	UP	-	-	-	○	-	-	-	-	●	❖551C508

❖ Select 8 for NPT ANSI 1.20.3 or select G for ISO G (228/1) ● Available feature ○ Available feature in DC only.

⁽¹⁾ Certified IEC 61508 Functional Safety data, use suffix "SL".

PREFIX TABLE

prefix							description	power level			
1	2	3	4	5	6	7		UP	LP	RP	BP
C	F	S	C				Solenoid + spade plug DIN 43650, 9,4 mm, industry standard B (EN 60730)	-	●	-	-
C	F	S	D				Solenoid + spade plug ISO 15217/DIN 43650, 8 mm, form C (EN 60730)	-	●	-	-
C	F	V	T				Solenoid with connection M12, LED + protection (EN 60730)	-	○	-	-
C	F	L					Solenoid with cable ends, LED + protection (EN 60730)	-	○	-	-
C	F	S	C	I	S		Intrinsically safe, spade plug DIN 43650, 9,4 mm, industry stand. B, ATEX (EN 50020) *	-	○	-	-
C	F	S	D	I	S		Intrinsically safe, spade plug ISO 15217/DIN 43650, 8 mm, form C, ATEX (EN 50020) *	-	○	-	-
C	F	V	T	I	S		Intrinsically safe, connector M12 (straight), LED + protection, ATEX (EN 50020) *	-	○	-	-
P	I	S	C				Solenoid, spade plug DIN 43650, 9,4 mm, industry stand. B, ATEX (EN 60730)	●	-	-	-
P	I	S	C	I	S		Intrinsically safe, spade plug DIN 43650, 9,4 mm, industry stand. B, ATEX (EN 50020) *	○	-	-	-

SUFFIX TABLE

suffix							description	power level			
1	2	3	4	5	6	7		UP	LP	RP	BP
	G	D					Non-electrical, 1 GD c, construction safety, gas/dust-ATEX (EN 13463-5)	-	-	-	-
			M	S			Screw type manual operator ⁽¹⁾	-	○/●	-	-
			M	O			Push type manual operator	○/●	○/●	-	-
S	L						Certified IEC 61508 Functional Safety data	○/●	○/●	-	-

OPTIONS & ACCESSORIES

series	pipe size	exhaust protector (stainless steel)
551	G 1/4	34600419 ⁽²⁾
	NPT 1/4	34600483 ⁽²⁾
	M5	34600484 ⁽²⁾

● Available feature

○ Available feature in DC only

- Not available

* ATEX solenoids are also approved to EN 50281-1-1 (dust) and EN 13463-1 (non electrical valves)

⁽¹⁾ Not to use with "SL" suffix⁽²⁾ Provided with "SL" suffix

PRODUCT SELECTION GUIDE

STEP 1

Select basic catalogue number, including pipe thread identification letter. Refer to the specifications table on page 7.

Example: G551C507

STEP 2

Select prefix (combination). Refer to the specifications table on page 7 and the prefix table on page 8, respect the indicated power level.

Air operated version, does not use prefix.

Example: CFSC

STEP 3

Select suffix (combination) if required.

Refer to the suffix table on page 8, respect the indicated power level.

GD suffix available for air operated version only (do not use manual operator suffix)

Example: MO

STEP 4

Select TPL, on page 9, mandatory for the pilot 630 (PISCIS), 12 HV DC (32 mW) and 24 HV DC (125 mW). Add "X" between the prefix "PISCIS" and the basic catalogue number.

STEP 5

Select voltage. Refer to standard voltages on page 9.

Example: 230V / 50Hz

STEP 6

Final catalogue / ordering number.

Example:

CFSC G551C507MO 230 V / 50 Hz

ORDERING EXAMPLES:

CFSC	G	551	C	507		230V / 50 Hz
CFSC	G	551	C	507	SL	230V / 50 Hz
CFSD	G	551	C	508	MO	230V / 50 Hz
CFVT	8	551	C	508	MO	230V / 50 Hz
CFL	G	551	C	508	MO	24V / DC
PISCIS	G	551	C	507	MO	6V / DC
PISCIS	G	551	C	507	SLMO	6V / DC
PISCIS X	G	551	C	508	MS	TPL20666 24HV / DC
	G	551	A	107		
	G	551	A	107	GD	
	G	551	A	107	GDSL	
	G	551	A	108		

prefix — pipe thread — basic number — voltage — TPL — suffix

CNOMO SOLENOID (PILOT) INTERFACE ELECTRICAL CHARACTERISTICS

Coil insulation class

F

Connector

Spade plug (cable Ø 4 - 6 mm or cable Ø 6 - 7 mm)

Connector specification

DIN 43650, 9,4 mm, industry standard B (CFSC/PISC/PISCIS prefixes)

ISO 15217 / DIN 43650, 8 mm, form C (CFSD/CFSDIS prefixes)

M12, IEC 60947-5-2/CNOMO E03-62-520N (CFVT/CFVTIS prefixes)

M12 (CFVT/CFVTIS prefixes) or cable ends (CFL prefix)

Connection

Electrical safety

IEC 335

Standard voltages

DC (=) CFSC/CFSD: 12V - 24V ; CFVT/CFL: 24V

CFSCIS/CFSDIS/CFVTIS: 12V - 24V

PISC: 24V to 70V ; PISCIS: 6V, 8V, 12V, 24V

AC (-) CFSC/CFSD: 24V - 115V - 230V/50Hz; other voltages and 60Hz are available on request

PISC: 24V to 70V

prefix option	power ratings				operator ambient temperature range (TS)	safety code	electrical enclosure protection (EN 60529)	replacement coil		type ⁽¹⁾
	inrush ~	holding ~		hot/cold =				~	=	
	(VA)	(VA)	(W)	(W)				(C°)	-	
Low power (LP)										
CFSC/CFSD	1,4	1,2	1,1	1/1,12	-25 to +60	EN 60730	moulded IP65	-	-	01
CFSC/CFSD	2,1 ⁽⁶⁾	1,6 ⁽⁶⁾	1,5 ⁽⁶⁾	-	-25 to +60	EN 60730	moulded IP65	-	-	01
CFVT/CFL ⁽⁵⁾	-	-	-	1,15/1,35	-25 to +60	EN 60730	moulded IP67/IP65	-	-	02-03
CFSCIS ⁽³⁾⁽⁴⁾	-	-	-	0,5	-10 to +50	II 1GD EEx ia IIC T5	moulded IP65	-	-	04
CFSDIS ⁽³⁾⁽⁴⁾	-	-	-	0,5	-10 to +50	II 1GD EEx ia IIC T5	moulded IP65	-	-	04
CFVTIS ⁽³⁾⁽⁴⁾	-	-	-	0,5	-10 to +50	II 1GD EEx ia IIC T5	moulded IP67	-	-	05
Ultra low power (UP)										
PISC	-	-	-	0,007	-0 to +60	-	moulded IP65	-	-	06
PISCIS ^{(2)(3)6V}	-	-	-	0,003	-20 to +50	II 1GD EEx ia IIC T6	moulded IP65	-	-	06
PISCIS ^{(2)(3)8V}	-	-	-	0,022	-20 to +50	II 1GD EEx ia IIC T6	moulded IP65	-	-	06
PISCIS ^{(2)(3)12LV}	-	-	-	0,012	-20 to +50	II 1GD EEx ia IIC T6	moulded IP65	-	-	06
PISCIS ^{(2)(3)12HV}	-	-	-	0,032	-20 to +50	II 1GD EEx ia IIC T6	moulded IP65	-	-	06
PISCIS ^{(2)(3)12LV}	-	-	-	0,046	-20 to +50	II 1GD EEx ia IIC T6	moulded IP65	-	-	06
PISCIS ^{(2)(3)12HV}	-	-	-	0,125	-20 to +50	II 1GD EEx ia IIC T6	moulded IP65	-	-	06

- Not available

⁽¹⁾ Refer to the dimensional drawings on pages 10 and 11.⁽²⁾ Piezotronic standards voltages:

Prefix PISCIS:	6 V DC / 3 mW	8 V DC / 22 mW	12 L V DC / 12 mW	12 H V DC / 32 mW	24 L V DC / 46 mW	24 H V DC / 125 mW
Turn ON voltage U _{ON}	6 .. 9 V	7,2 .. 12 V	10,8 .. 16 V	10,8 .. 16 V	21,6 .. 28 V	21,6 .. 28 V
Turn OFF voltage U _{OFF}	3 V	3,2 V	3,3 V	3,3 V	5 V	5 V
Peak current	6 mA	10 mA	6,8 mA	8,1 mA	10 mA	14 mA
Holding current	0,5 mA	2,8 mA	1 mA	2,7 mA	1,9 mA	5,2 mA
Cable + max. barrier resistances (R _s + R _c)	1200 Ω max.	300 Ω max.	1200 Ω max.	470 Ω max.	1200 Ω max.	470 Ω max.

prefix option	safety parameters				
	U _I = (DC)	I _I	P _I	L _I	C _I
	(V)	(mA)	(W)	(μF)	(mF)
Low power (LP)					
CFSCIS	28	300	1,6	0	0
CFSDIS/CFVTIS	28	300	1,6	0	0
Ultra low power (UP)					
PISCIS	30	200	0,9	0	0

⁽³⁾ Intrinsically safe pilots: Check the electrical characteristics in the corresponding catalogue pages (CFSCIS/CFSDIS/CFVTIS: 302 pilots / PISCIS: 630 pilot).⁽⁴⁾ CFSCIS/CFSDIS/CFVTIS (302 pilots):12 V : I_{ON} min., with LED = 33 mA; U_{ON} min. = 11,9 V; U_(max) recommended = 23 V; U_{OFF} = 3,3 V; I_{OFF} = 10 mA24 V : I_{ON} min., with LED = 25 mA; U_{ON} min. = 16,4 V; U_(max) recommended = 28 V; U_{OFF} = 5,7 V; I_{OFF} = 7 mA⁽⁵⁾ Values for LED + protection. Used with TPL 20674 (CFSC and CFSD prefixes)⁽⁶⁾ AC: 230 V

- Not available

ADDITIONAL OPTIONS


- TPL numbers: TPL **20665**: Piezotronic, PISCIS prefix, 12 HV (32 mW)
TPL **20666**: Piezotronic, PISCIS prefix, 24 HV (125 mW)
- TPL numbers: TPL **20674**: LED and protection, CFSC / CFSD prefixes - Add 0,15 W (DC) and 0,4 W/VA (AC)
Only available in 24 V AC/DC and 115 V AC
- Other pipe threads are available on request

INSTALLATION

- Installation/maintenance instructions are included with each valve
- The solenoid valves and air operated valves can be mounted in any position without affecting operation
- IEC 61508 Functional Safety (Suffix SL), allowable temperature range: -40°C to +60°C. Probability of failure on demand, contact us
- It is necessary to connect pipes or fittings to the exhaust ports to protect the internal parts of the spool valve and its pneumatic operator if used outside or in harsh environments (dusts, liquids etc.)
- Threaded pipe connection identifier is: 8 = NPT (ANSI 1.20.3); G = G (ISO 228/1)
- Valves with suffix "SL" are provided with a specific exhaust protector


DIMENSIONS (mm), WEIGHT (kg)

Type 01..06: CNOMO size 15 (E06.36.120N)

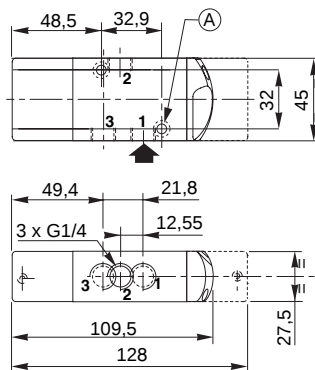

(A) 2 mounting holes 5.3 mm dia.;
Spotfacing: 9 mm dia., depth 5 mm

Type 07: Air operated

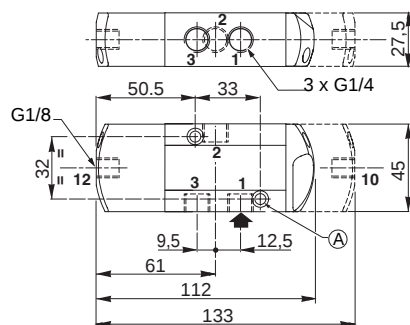


TYPE 01

Prefix "CFSC" and "CFSD" Solenoid
Low power
302 pilot
Polyarylamide
IEC 335 / DIN 43650, 9,4 mm/8 mm (cable 4 - 6 mm)
IP65

551C507 / 551C508

551C507MS / 551C508MS / 551C507MO / 551C508MO

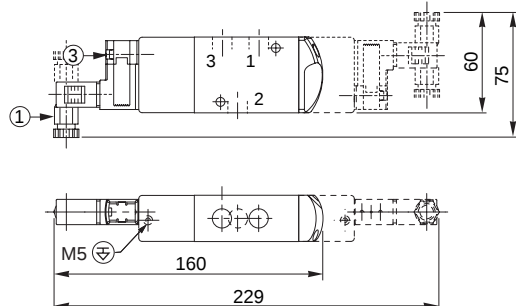


TYPE 02

Prefix "CFVT" Solenoid
Low power
302 pilot
Polyarylamide
IEC 335 / M12 connection + LED and protection
IP67

551C507 / 551C508

551C507MS / 551C508MS / 551C507MO / 551C508MO

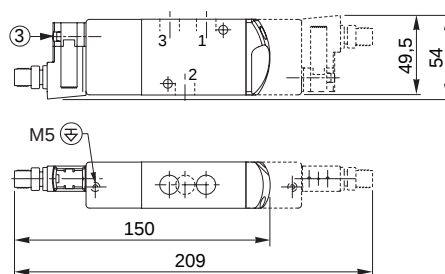


TYPE 03

Prefix "CFL" Solenoid
Low power
302 pilot
Polyarylamide
IEC 335 / cable ends + LED and protection
IP65

551C507 / 551C508


551C507MS / 551C508MS / 551C507MO / 551C508MO

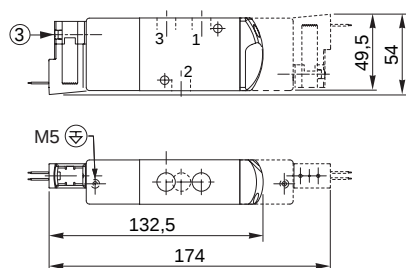

TYPE 04

Prefix "CFSCIS" and "CFSDIS" Solenoid
Low power
302 pilot
Polyarylamide
IEC 335 / DIN 43650, 9,4 mm/8 mm (cable 6 - 7 mm)
EN 50020 and EN 50281-1-1
IP65 / II 1 GD EEx ia IIC

551C507MO / 551C508MO

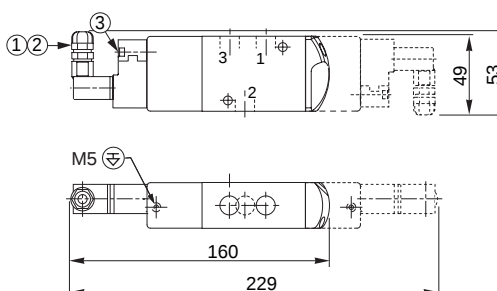


DIMENSIONS (mm), WEIGHT (kg)



TYPE 05

Prefix "CFVTIS" Solenoid
Low power
302 pilot
Polyarylamide
IEC 335 / connector M12 + LED and protection
EN 50020 and EN 50281-1-1
IP67 / II 1 GD EEx ia IIC



551C507MO / 551C508MO

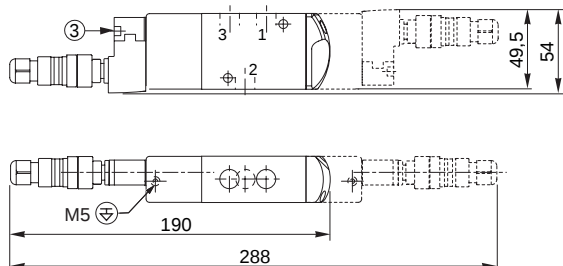

TYPE 06

Prefix "PISC" and "PISCIS" Solenoid
Ultra low power
630 pilot (piezotronic)
Polyamide, epoxy coated
IEC 335, DIN 43650, 9,4 mm
EN 50020 and EN 50281-1-1 (PISCIS)
IP65 / II 1 GD EEx ia IIC


551C507MO / 551C508MO

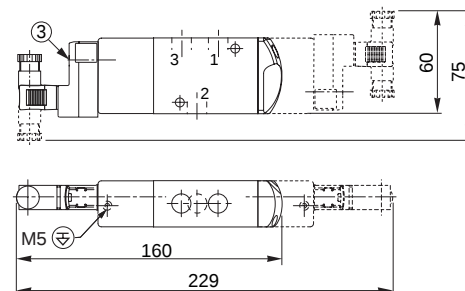

TYPE 07

Air operated version
No prefix
Use "SL", "GD" or "GDSL" suffix
IP65 / II 1 GD c

551A107 / 551A108

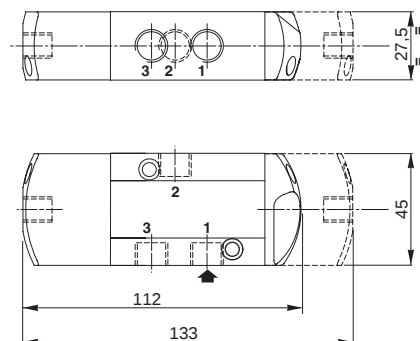


- ① Connector rotatable by 90° increments (cable 4 - 6 mm)
- ② Connector rotatable by 90° increments (cable 6 - 7 mm)
- ③ Manual operator location
- ⊕ Connectable pilot exhaust port

type	prefix option	power level	weight ⁽¹⁾	
			monostable	bistable
01	CFSC / CFSD	low power	0,883	1,091
02	CFVT	low power	0,883	1,091
03	CFL	low power	0,876	1,077
04	CFSCIS / CFSDIS	low power	0,888	1,101
05	CFVTIS	low power	0,91	1,145
06	PISC / PISCIS	ultra low power	0,867	1,059
07	-	-	0,831	0,987

⁽¹⁾ Incl. connector(s), except CFVT.

ACCESSORIES



exhaust protector
(stainless steel)

ACCESSORIES


**supply rail with seals and banjo bolts
(without mounting brackets)**
(1)

supply rail for "n" valves	catalogue number	
	G 1/4	NPT 1/4
2	88100034	88100053
3	88100035	(4)
4	88100036	88100054
5	88100037	88100058
6	88100038	88100055
7	88100039	88100059
8	88100040	88100060

(4) On request.

**supply rail with isolation valves
(without mounting brackets) (2) - allows the isolation
of one or more valves from the general pressure supply**



supply rail for "n" valves	catalogue number	
	G 1/4	
2	88100717	
3	88100718	
4	88100719	
5	88100720	
6	88100721	
7	88100722	
8	88100723	





series 551	number of valves							
	2	3	4	5	6	7	8	
A	108	136	164	192	220	248	276	
B	92	120	148	176	204	232	260	
C	55	83	111	139	167	195	223	
D	78	106	134	162	190	218	246	
E	42	70	98	126	154	182	210	
type	weight (kg)							
01/02, mono/bistable	2,1/2,5	3,1/3,7	4,1/4,9	5,2/6,1	6,3/7,3	7,4/8,5	8,5/9,7	
03, mono/bistable	2,2/2,6	3,2/3,8	4,2/5	5,3/6,2	6,4/7,4	7,5/8,6	8,6/9,8	
04, mono/bistable	2/2,4	3/3,6	4/4,8	5,1/6	6,2/7,2	7,3/8,4	8,4/9,6	
05, mono/bistable	2,2/2,6	3,2/3,8	4,2/5	5,3/6,2	6,4/7,4	7,5/8,6	8,6/9,8	
06, mono/bistable	2,1/2,5	3,1/3,7	4,1/4,9	5,2/6,1	6,3/7,3	7,4/8,5	8,5/9,7	
07, mono/bistable	2/2,18	2,9/3,67	3,9/4,86	4,9/6,05	5,9/7,24	7/8,43	8,1/9,62	

set of 2 mounting brackets (3)



series	catalogue number
551	88100049

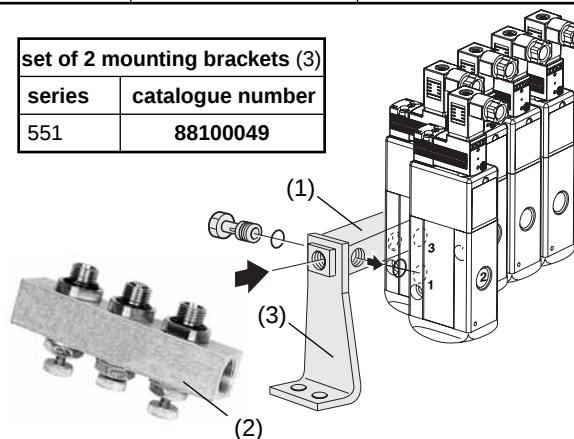


TYPE 01-02-03-04-05-06
see pages 10 and 11

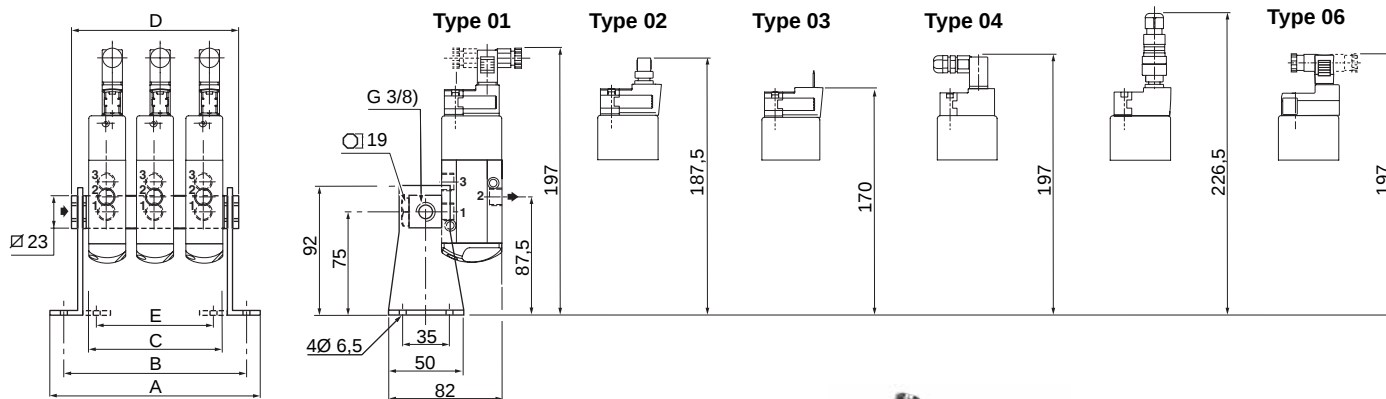

TYPE 07
see page 11

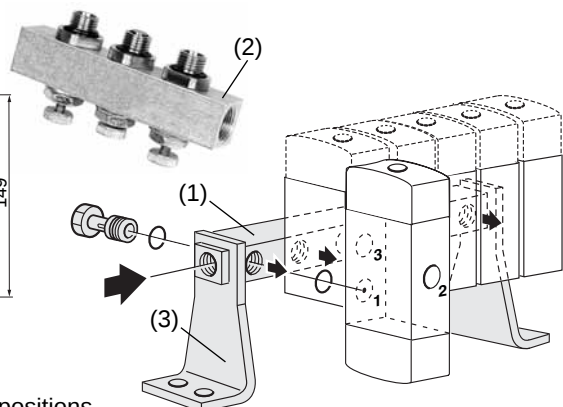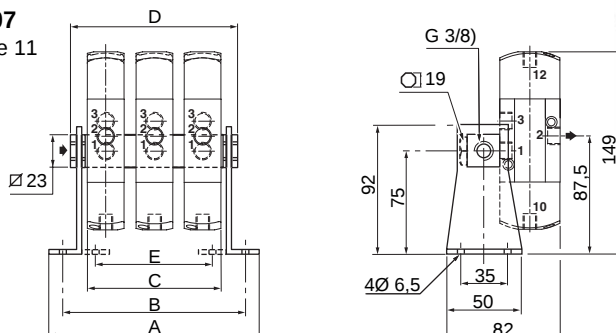

This mounting arrangement allows valves to be mounted in any of 4 positions.

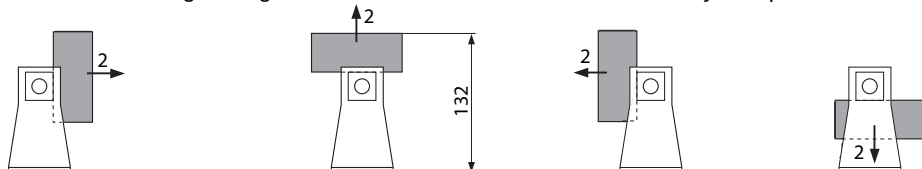

set of 2 mounting brackets (3)	
series	catalogue number
551	88100049